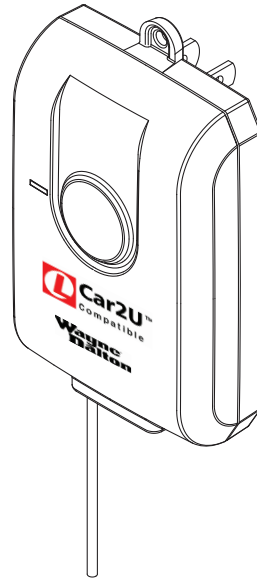




Car2U™ Receiver

for use with Car2U Universal
Garage Door Opener Transmitter

Models: WDRR-372, WDRR-372R
Operating Instructions
and Owner's Manual



Your Car2U Receiver is designed to allow you to use your in-vehicle Car2U Transmitter with any garage door opener. Simply follow the instructions to connect it to the wired accessory terminal block of your garage door opener, then finish by following the easy programming steps.

IMPORTANT NOTICE!

Read the enclosed instructions carefully before installing the Car2U Receiver. Pay close attention to all warnings and notes. This manual should be retained for future reference.

PACKAGE CONTENTS




Car2U Receiver



Screw
6-32 X 3/4



6 ft. Twin lead
wire



Instruction
Manual














Table of Contents

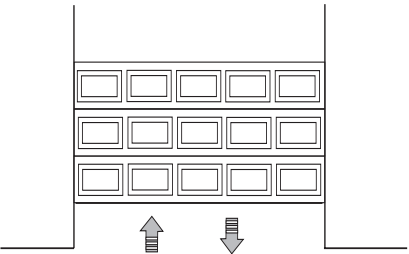
Package Contents	1
Warnings	2
Set-up	3 - 4
Operation	5
Regulatory Compliance	6

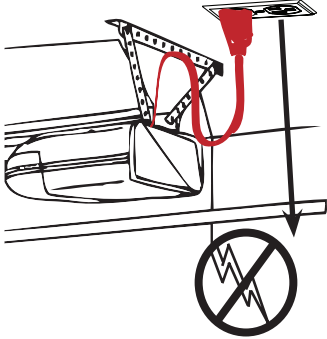

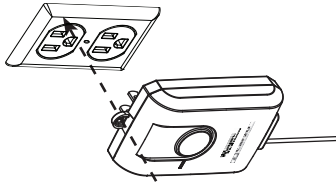
Definition of Symbol

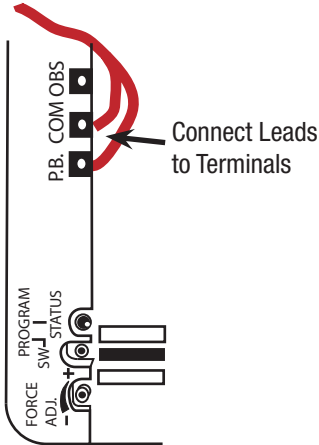
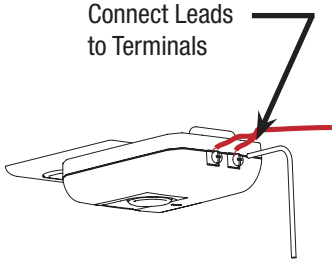
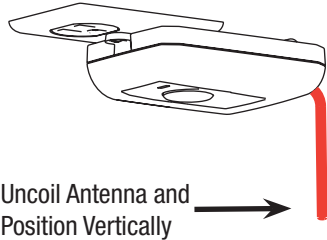
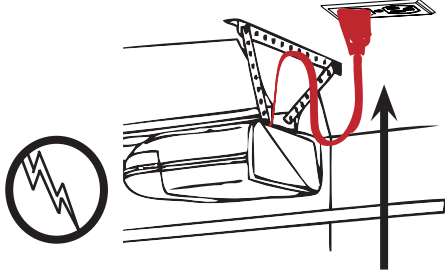


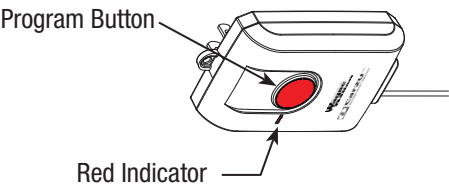
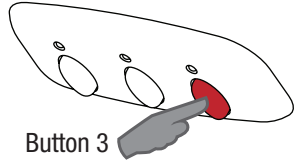
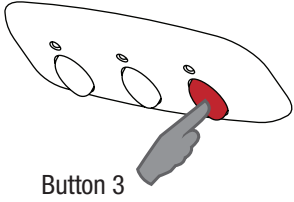
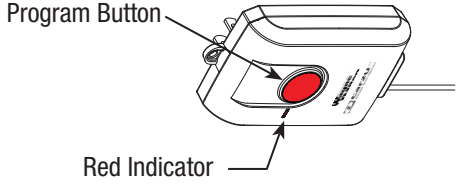
Warning

-
-  **INSTALLATION SAFETY PRECAUTIONS WARNING:**
INCORRECT INSTALLATION CAN LEAD TO SEVERE OR FATAL INJURY. FOLLOW THESE INSTRUCTIONS CAREFULLY.
 -  Before installing this receiver, read the door operator's instruction manual fully, so you are aware of all of the unit's functions and features.
 -  Wear protective gloves to install, repair, or adjust door or operator to avoid injuries.
 -  Wear eye protection when using tools to install, repair, or adjust door or operator to prevent eye injuries.
 -  Before installing receiver, disconnect all power to door operator to prevent unintended operation. Disconnect all power to the electrical outlet the Receiver will be plugged into.
 -  Do NOT connect this Receiver to a power source until instructed to do so. Do NOT reconnect power to the door operator until instructed to do so.
 -  Keep fingers and other body parts away from all moving parts of the door operator system while the system is being operated.
 -  The door safety beams must be in working order and must not be obstructed during the programming steps.
 -  **WARNING** -- TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS DEVICE TO RAIN, WATER, OR WET LOCATIONS.
 -  NEVER LET CHILDREN OPERATE, OR PLAY WITH DOOR CONTROLS! KEEP REMOTE CONTROL AWAY FROM CHILDREN.
 -  ALWAYS KEEP MOVING DOOR IN SIGHT AND KEEP PEOPLE AND OBJECTS AWAY UNTIL DOOR IS COMPLETELY CLOSED. NO ONE SHOULD CROSS THE PATH OF THE MOVING DOOR.
 -  NEVER GO UNDER A STOPPED, PARTIALLY OPEN DOOR.
 -  **- IMPORTANT SAFETY INSTRUCTIONS -**
 1. Read these instructions.
 2. Keep these instructions.
 3. Heed all warnings.
 4. Follow all instructions.
 5. Do not use this apparatus near water.
 6. Clean only with dry cloth.
 7. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
 8. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit your outlet, consult an electrician for replacement of the obsolete outlet.
 9. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Installation Safety Precautions	
<ol style="list-style-type: none"> 1. Make sure Garage Door Opener has been properly installed in accordance with unit's installation instructions. 2. Test and confirm proper operation of the Garage Door Opener before proceeding with the installation of this receiver. 	

Installation	
<ol style="list-style-type: none"> 1. Turn off power to the Garage Door Opener before proceeding. 2. Turn off power to the AC outlet the Car2U Receiver will be plugged into before proceeding. Note: This could be the same outlet as in step 1. 	
<ol style="list-style-type: none"> 3. Remove the screw that attaches the outlet cover plate. Note: Do NOT remove the cover plate. 	 <p style="text-align: center;">Remove Screw ↓</p>
<ol style="list-style-type: none"> 4. Plug the Car2U Receiver into the AC outlet positioning it so that the screw mounting flange hole is aligned with the outlet cover plate screw hole. 5. Install the screw (provided) through the Car2U Receiver mounting flange into the outlet and tighten screw. Be careful not to overtighten. 	 <p style="text-align: center;">Insert Screw (Provided)</p>

Installation	
<p>6. Connect one end of enclosed twin-lead wires to the Garage Door Opener push-button terminals. These terminals are typically labeled "P.B." and "COM".</p> <p>Hint: Connect to the same two terminals used by your existing wall control.</p> <p>Also, see your Garage Door Opener owner's manual for specific wiring instructions. (If you need to purchase more wire, use only 22AWG or larger; CL2X or better wire.)</p>	
<p>7. Connect the opposite end of the twin-lead wires to the Car2U Receiver's relay terminals.</p> <p>8. Fasten the twin-lead wires to the wall or operator support structure so that it cannot become entangled with the Garage Door Opener during operation.</p>	
<p>9. Straighten the Car2U Receiver antenna wire and position it in the most vertical position allowable.</p> <p>DO NOT CUT ANTENNA WIRE.</p>	
<p>10. Turn on power to the Garage Door Opener AC circuit and turn on power to the AC outlet the receiver is plugged into.</p>	

Operation	
<p>Use the following procedure for programming your Car2U Transmitter to the Car2U Receiver.</p> <p>Step 1. Go to the Car2U Receiver and press and release its Program button. (Red indicator turns ON)</p>	 <p>Program Button</p> <p>Red Indicator</p> <p>Helpful hint: A broom handle can be used to extend your reach for depressing the program button.</p>
<p>Step 2. Press and Hold for 1 second Button 3 on your in-vehicle Car2U Transmitter.</p>	 <p>Button 3</p>
<p>Step 3. Press and release Button 3 on your in-vehicle Car2U Transmitter once more to operate the door. Caution: Door will move if operation is successful.</p> <p>Note 1: To program your in-vehicle transmitter Buttons 1 or 2, please see your vehicle's owners manual for instructions on programming with rolling code receivers.</p> <p>Note 2: A maximum of 8 transmitters can be programmed to the Car2U Receiver. All transmitters programmed after the 8th transmitter, will replace the 8th transmitter.</p>	 <p>Button 3</p>
Reset	
<p>Use the following procedure to reset your Car2U Receiver. This operation will remove all transmitters programmed to this Receiver.</p> <ol style="list-style-type: none"> 1. Plug the Car2U Receiver into an appropriate AC outlet. 2. Press and hold the program button for 10 seconds. The Red Indicator will flash 3 times to indicate a successful reset. 	 <p>Program Button</p> <p>Red Indicator</p>

FCC and IC Statement

FCC Regulatory Information:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- a) reorient or relocate the receiving antenna,
- b) increase the separation between the equipment and receiver,
- c) connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

IC Regulatory Information:

This Class B digital apparatus meets all requirements of the Canadian Interference Causing Equipment Regulations. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation of the device.

Cet appareillage numérique de la classe B répond à toutes les exigences de l'interférence canadienne causant des règlements d'équipement. L'opération est sujette aux deux conditions suivantes: (1) ce dispositif peut ne pas causer l'interférence nocive, et (2) ce dispositif doit accepter n'importe quelle interférence reçue, y compris l'interférence qui peut causer l'opération peu désirée.

WARNING: Changes or modifications to this receiver not expressly approved by Wayne-Dalton Corp. could void the user's authority to operate this equipment.